


Superdan® Rope

Because Superdan® rope is manufactured from high tenacity polypropylene yarns, Superdan® offers easy handling, high strength and excellent abrasion resistance.

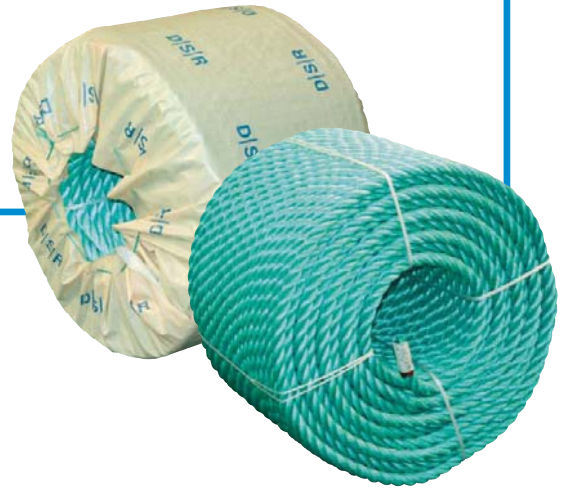

Advanced durability

- Excellent anti-abrasion properties contribute to longer working life.(over 10% compared to standard ropes)
- High ultra-violet light resistance.

Super Strength

- 50% better breaking strength compared to BS and ISO standards & specifications.
- A cost effective super strength rope.

Variety of Applications

- A multi purpose rope ideal for general industrial & commercial fishing applications.
- An excellent rope for deep sea pot rope.

Superdan® 3-Strand Rope

Dia.		Circ.	Weight			Breaking Strength	
mm	Inch	Inch	KGS/100M	LBS/100FT	LBS/100FM	Kg	kN
6	1/4	3/4	1.75	1.18	7.06	680	6.70
8	5/16	1	3.0	2.02	12.10	1,200	11.8
9	3/8	1-1/8	3.8	2.55	15.32	1,500	14.7
10	13/32	1-1/4	4.5	3.02	18.14	1,800	17.7
12	15/32	1-1/2	6.6	4.44	26.61	2,700	26.5
14	9/16	1-3/4	9.1	6.11	36.69	3,600	35.3
16	5/8	2	11.6	7.79	46.77	4,500	44.1
18	23/32	2-1/4	14.9	10.01	60.07	5,800	56.9
20	13/16	2-1/2	17.9	12.03	72.17	6,900	67.7
22	7/8	2-3/4	22.0	14.78	88.70	8,400	82.4
24	15/16	3	26.0	17.47	104.83	9,900	97.1
26	1-1/32	3-1/4	30.6	20.56	123.37	11,500	112.8
28	1-1/8	3-1/2	35.5	23.86	143.13	13,200	129.5
30	1-3/16	3-3/4	41.1	27.62	165.71	15,000	147.2
32	1-1/4	4	46.0	30.91	185.46	16,800	164.8
36	1-7/16	4-1/2	58.0	38.97	233.85	20,600	202.1
40	1-19/32	5	71.5	48.05	288.28	25,700	252.1
44	1-3/4	5-1/2	88.5	59.47	356.82	31,800	312.0
48	1-7/8	6	104.0	69.89	419.31	36,600	359.0
52	2-1/16	6-1/2	122.0	81.98	491.88	42,100	413.0
56	2-1/4	7	142.0	95.42	572.52	48,700	477.7
60	2-3/8	7-1/2	163.0	109.53	657.19	55,300	542.5
64	2-1/2	8	185.0	124.31	745.89	62,500	613.1
70	2-3/4	8-11/16	221.0	148.51	891.04	74,300	728.9
72	2-7/8	9	234.0	157.24	943.45	77,900	764.2
80	3-2/32	10	290.0	194.87	1,169.23	96,000	941.8
88	3-7/16	11	351.0	235.86	1,415.17	116,200	1,139.9
96	3-13/16	12	417.0	280.21	1,681.28	137,200	1,345.9
100	3-15/16	12-3/8	452.3	303.93	1,823.60	148,900	1,460.7

Manufactured and tested according to ISO and BSEN standard
Warning : The minimum breaking strength should never be considered as the safe working load of the rope

Superdan® 8-Strand Rope

Dia.		Circ.	Weight			Breaking Strength	
mm	Inch	Inch	KGS/100M	LBS/100FT	LBS/100FM	Kg	kN
24	15/16	3	28.8	19.4	116.1	10,900	106.9
28	1-1/8	3-1/2	39.4	26.5	158.9	14,500	142.2
32	1-1/4	4	51.1	34.3	206.0	18,500	181.5
36	1-7/16	4-1/2	64.1	43.1	258.4	23,000	225.6
40	1-9/16	5	79.1	53.2	318.9	28,400	278.6
44	1-3/4	5-1/2	97.7	65.7	393.9	33,900	332.5
45	1-25/32	5-5/8	102.0	68.5	411.2	35,400	347.3
48	1-7/8	6	114.5	76.9	461.6	39,800	390.4
50	2	6-1/4	124.5	83.7	502.0	42,500	416.9
52	2-1/16	6-1/2	134.0	90.0	540.3	46,000	451.2
55	2-5/32	6-7/8	150.5	101.1	606.8	50,900	499.3
56	2-1/4	7	156.0	104.8	629.0	52,800	518.0
60	2-3/8	7-1/2	179.0	120.3	721.7	60,500	593.5
64	2-1/2	8	203.6	136.8	820.9	68,200	669.0
65	2-9/16	8-1/16	210.0	141.1	846.7	70,400	690.6
68	2-11/16	8-1/2	230.0	154.6	927.3	77,600	761.2
70	2-3/4	8-11/16	243.5	163.6	981.8	82,200	806.4
72	2-7/8	9	258.0	173.4	1,040.2	85,800	841.7
75	3	9-1/4	279.5	187.8	1,126.9	93,100	913.3
80	3-5/32	10	319.0	214.4	1,286.2	105,600	1,035.9
85	3-3/8	10-1/2	360.5	242.2	1,453.5	118,800	1,165.4
88	3-7/16	11	386.0	259.4	1,556.3	127,600	1,251.7
90	3-9/16	11-1/8	403.5	271.1	1,626.8	133,400	1,308.6
95	3-3/4	11-3/4	449.5	302.1	1,812.3	146,500	1,437.1
96	3-13/16	12	459.0	308.4	1,850.6	149,600	1,467.5
100	3-15/16	12-3/8	498.0	334.6	2,007.9	162,400	1,593.1
104	4-1/8	13	536.0	360.2	2,161.1	175,600	1,722.6
112	4-7/16	14	623.0	418.6	2,511.8	203,700	1,998.2
120	4-3/4	15	718.0	482.5	2,894.9	233,800	2,293.5

Manufactured and tested according to ISO and BSEN standard
Warning : The minimum breaking strength should never be considered as the safe working load of the rope

Superdan® 12-Strand Rope

Dia.		Circ.	Weight			Breaking Strength	
mm	Inch	Inch	KGS/100M	LBS/100FT	LBS/100FM	Kg	kN
36	1-7/16	4-1/2	64.1	43.1	258.4	24,100	236.4
40	1-9/16	5	79.1	53.2	318.9	29,800	292.3
44	1-3/4	5-1/2	97.7	65.7	393.9	35,600	349.2
48	1-7/8	6	114.5	76.9	461.6	42,000	412.0
52	2-1/16	6-1/2	134.0	90.0	540.3	48,500	475.8
56	2-1/4	7	156.0	104.8	629.0	55,400	543.5
60	2-3/8	7-1/2	179.0	120.3	721.7	64,000	627.8
64	2-1/2	8	203.6	136.8	820.9	72,000	706.3
68	2-11/16	8-1/2	230.0	154.6	927.3	82,000	804.4
72	2-7/8	9	258.0	173.4	1,040.2	90,500	887.8
80	3-5/32	10	319.0	214.4	1,286.2	111,000	1,088.9
88	3-7/16	11	386.0	259.4	1,556.3	134,000	1,314.5
96	3-13/16	12	459.0	308.4	1,850.6	158,000	1,549.9
104	4-1/8	13	536.0	360.2	2,161.1	185,000	1,814.8
112	4-7/16	14	623.0	418.6	2,511.8	214,000	2,099.3
120	4-3/4	15	718.0	482.5	2,894.9	246,000	2,416.2

Manufactured and tested according to ISO and BSEN standard
Warning : The minimum breaking strength should never be considered as the safe working load of the rope

